



SUBIÑAS

50 AÑOS AL SERVICIO DE LA TAPICERIA Y EL COLCHÓN



BONNELL UNITS
BEDDING DIVISION

✓ Round framed "Bonnell" Unit



Technical specifications:

- Technical specifications:
- Number of turns: 5
- Height of the spring: 150 mm.
- Diameter of the cup: from 80 mm. to 90 mm.
- Thickness of wire: Ø 2.10 mm.; Ø 2.20 mm.; Ø 2.30 mm.; Ø 2.40 mm. (From 14 g. to 12 3/4 g.)
- Helical wire: Ø 1.35 mm. (17 g.)
- Round frame wire: Ø 4.50 mm. (7 g.)

Mattress Size	Units Size	Width						
		90	105	135	140	150	160	180
		87	102	132	137	147	157	177
190	187	8 X 22	9 X 22	12 X 22	12 X 22	14 X 22	15 X 22	17 X 22
200	196	8 X 23	9 X 23	12 X 23	12 X 23	14 X 23	15 X 23	19 X 23

Press packed in 10/12/16 units (metal or timber grids)

✓ Round framed "Super height Bonnell" Unit




Technical specifications:

- Number of turns: 5 or 6
- Height of the spring: 170 mm.
- Diameter of the cup: from 80 mm. to 90 mm.
- Thickness of wire: Ø 2.10 mm.; Ø 2.20 mm.; Ø 2.30 mm.; Ø 2.40 mm.
(From 14 g. to 12 3/4 g.)
- Helical wire: Ø 1.35 mm. (17 g.)
- Round frame wire: Ø 4.50 mm. (7 g.)

Mattress Size	Units Size	Width						
		90	105	135	140	150	160	180
		87	102	132	137	147	157	177
190	187	9 X 23	10 X 23	13 X 23	14 X 23	15 X 23	16 X 23	18 X 23
200	196	9 X 24	10 X 24	13 X 24	14 X 24	15 X 24	16 X 24	18 X 24

Press packed in 10/12 units (metal or timber grids)

✓ **No framed / Top and Bottom Helical "Bonnell" Units**

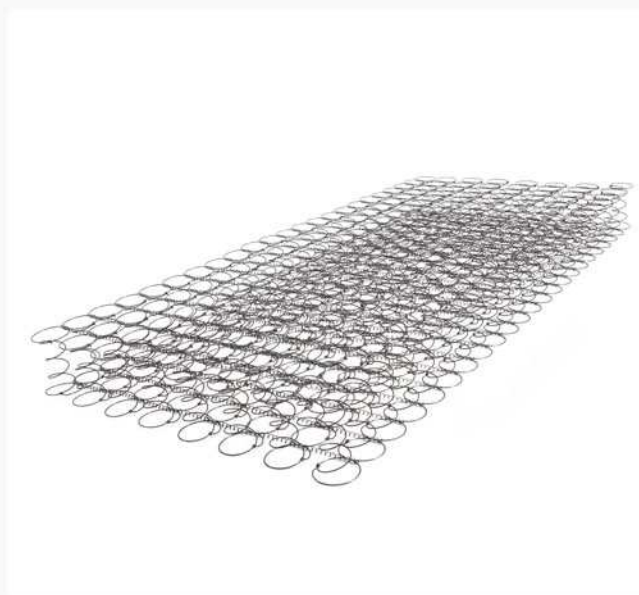

Technical specifications:

- Number of turns: 4; 5 or 6
- Height of the spring: from 80 to 170 mm.
- Diameter of the cup: from 80 mm. to 90 mm.
- Thickness of wire: Ø 2.10 mm.; Ø 2.20 mm.; Ø 2.30 mm.; Ø 2.40 mm.
(From 14 g. to 12 3/4 g.)
- Helical wire: Ø 1.35 mm. (17 g.)

Mattress Size	Units Size	Width						
		90	105	135	140	150	160	180
		87	102	132	137	147	157	177
182	179	8 X 21	9 X 21	13 X 21	14 X 21	14 X 21	15 X 21	
190	187	8 X 22	9 X 22	13 X 22	14 X 22	14 X 22	15 X 22	17 X 22
200	197	8 X 23	9 X 23	13 X 23	14 X 23	14 X 23	15 X 23	17 X 23

Roll packed in 10/12 units (Kraft paper)

✓ Flat Framed "Bonnell" Unit



Technical specifications:

- Number of turns: 4; 5 or 6
- Height of the spring: from 80 to 170 mm.
- Diameter of the cup: from 80 mm. to 90 mm.
- Thickness of wire: Ø 2.10 mm.; Ø 2.20 mm.; Ø 2.30 mm.; Ø 2.40 mm.
(From 14 g. to 12 3/4 g.)
- Helical wire: Ø 1.35 mm. (17 g.)
- Oil tempered steel flat wire frame: 10 x 1.7 mm.

Mattress Size	Units Size	Width						
		90	105	135	140	150	160	180
		87	102	131	137	147	157	177
182	179	8 X 21	9 X 21	12 X 21	12 X 21	14 X 21	15 X 21	17 X 21
190	187	8 X 22	9 X 22	12 X 22	12 X 22	14 X 22	15 X 22	17 X 22
200	196	8 X 23	9 X 23	12 X 23	12 X 23	14 X 23	15 X 23	17 X 23

Roll packed in 10/12 units/roll (Kraft paper)

✓ **"Extra Hard Bonnell" Unit (Framed / No Framed)**



Technical specifications:

- Number of turns: 5
- Height of the spring: 150 mm.
- Diameter of the cup: from 80 mm. to 90 mm.
- Thickness of wire: Ø 2.10 mm.; Ø 2.20 mm.; Ø 2.30 mm.; Ø 2.40 mm. (From 14 g. to 12 3/4 g.)
- Helical wire: Ø 1.35 mm. (17 g.)
- Round frame wire: Ø 4.50 mm. (7 g.)
- Oil tempered steel flat wire frame: 10 x 1.7 mm.

Mattress Size	Units Size	Width						
		90	105	135	140	150	160	180
		87	102	132	137	147	157	177
182	179	8 X 21	9 X 21	13 X 21	14 X 21	14 X 21	15 X 21	
190	187	8 X 22	9 X 22	13 X 22	14 X 22	14 X 22	15 X 22	17 X 22
200	197	8 X 23	9 X 23	13 X 23	14 X 23	14 X 23	15 X 23	17 X 23

Press packed in 10/12/16 units (metal or timber grids)

Roll packed in 10/12 units/roll (Kraft paper)

✓ Round / flat framed "Low Profile Bonnell" Unit



Technical specifications:

- Number of turns: 4
- Height of the spring: from 8 mm. to 115 mm.
- Diameter of the cup: from 80 mm. to 90 mm.
- Thickness of wire: Ø 2.10 mm.; Ø 2.20 mm.; Ø 2.30 mm.; Ø 2.40 mm.
(From 14 g. to 12 3/4 g.)
- Helical wire: Ø 1.35 mm. (17 g.)
- Round frame wire: Ø 4.50 mm. (7 g.)
- Oil tempered steel flat wire frame: 10 x 1.7 mm.

Mattress Size	Units Size	Width				
		90	105	135	140	150
		87	102	132	137	147
182	179	8 X 21	9 X 21	12 X 21	12 X 21	14 X 21
190	187	8 X 22	9 X 22	12 X 22	12 X 22	14 X 22
200	196	8 X 23	9 X 23	12 X 23	12 X 23	14 X 23

Press packed in 14/20 units (metal or timber grids)

Roll packed in 14 units/roll (Kraft paper)

✓ No Framed "Low Profile Bonnell" Unit



Technical specifications:

- Number of turns: 4
- Height of the spring: from 8 mm. to 115 mm.
- Diameter of the cup: from 80 mm. to 90 mm.
- Thickness of wire: Ø 2.10 mm.; Ø 2.20 mm.; Ø 2.30 mm.; Ø 2.40 mm.
(From 14 g. to 12 3/4 g.)
- Helical wire: Ø 1.35 mm. (17 g.)

Mattress Size	Units Size	Width						
		90	105	135	140	150	160	180
		87	102	132	137	147	157	177
182	179	8 X 21	9 X 21	12 X 21	12 X 21	14 X 21		
190	187	8 X 22	9 X 22	12 X 22	12 X 22	14 X 22	15 X 22	
200	196	8 X 23	9 X 23	12 X 23	12 X 23	14 X 23	15 X 23	17 X 23

Roll packed in 14 units/roll (Kraft paper)



SUBIÑAS

50 AÑOS AL SERVICIO DE LA TAPICERIA Y EL COLCHÓN

**POCKET UNITS
BEDDING DIVISION**



✓ "Foam Encased Pocket" Unit // "Pocket - BOX - Plus 15"



Technical specifications:

- Foam frame 30 kg. / m3 (\pm 80 mm.)
- Number of turns: 6
- Height of the spring: 145 mm.
- Height of the foam encased unit: 145 mm.
- Diameter of the barrel: from 55 mm. to 72 mm.
- Thickness of wire: \varnothing 1.60 mm.; \varnothing 1.80 mm.; \varnothing 2.00 mm. (From 16 g. to 14 g.)
- Top and bottom Needle punch fabric 100 gr.

Mattress Size	Units Size	Width							
		80	90	105	120	135	140	150	160
		80	90	105	120	135	140	150	160
182	182	10 X 28	11 X 28	14 X 28	17 X 28	18 X 28	19 X 28	21 X 28	
190	190	10 X 29	11 X 29	14 X 29	17 X 29	18 X 29	19 X 29	21 X 29	22 X 29
200	200	10 X 31	11 X 31	14 X 31	17 X 31	18 X 31	19 X 31	21 X 31	22 X 31

Roll packed in 4 units/roll (Kraft paper)

✓ "Foam Encased Pocket" Unit // "Pocket - BOX - Plus 17"



Technical specifications:

- Foam frame 30 kg. / m³ (± 80 mm.)
- Number of turns: 7
- Height of the spring: 170 mm.
- Height of the foam encased unit: 170 mm.
- Diameter of the barrel: from 55 mm. to 72 mm.
- Thickness of wire: Ø 1.60 mm.; Ø 1.80 mm.; Ø 2.00 mm. (From 16 g. to 14 g.)
- Top and bottom Needle punch fabric 100 gr.

Mattress Size	Units Size	Width									
		80	90	105	120	135	140	150	160	180	200
		80	90	105	120	135	140	150	160	180	200
182	182	10 X 27	11 X 27	13 X 27	16 X 27	18 X 27	19 X 27	20 X 27	22 X 27		
190	190	10 X 29	11 X 29	13 X 29	16 X 29	18 X 29	19 X 29	20 X 29	22 X 29	25 X 29	
200	200	10 X 30	11 X 30	13 X 30	16 X 30	18 X 30	19 X 30	20 X 30	22 X 30	25 X 30	28 X 30

Roll packed in 4 units/roll (Kraft paper)

✓ Low height pocket springs



Advantages:

- Great level of point elasticity.
- Active body support.
- Transpiration: Air flow channels
- Maximum comfort and independency.
- Wide range of application up to 5.000 springs/unit.
- NFS: noise-free system.

Product possibilities:

- High 20 mm. and 40 mm.
- Ø of the wire 1 and 1.4 mm.
- Cloth 70 gr/m²
- Coil count/m²: from 300 to 700 springs/m²