


ForcEdge

- ✓ No need foam encase
- ✓ Big savings in labor + polyurethane foam
- ✓ Better flexibility for bedding in a box system
- ✓ Ever last perimeter

**Subiñas**  
*desde 1959*


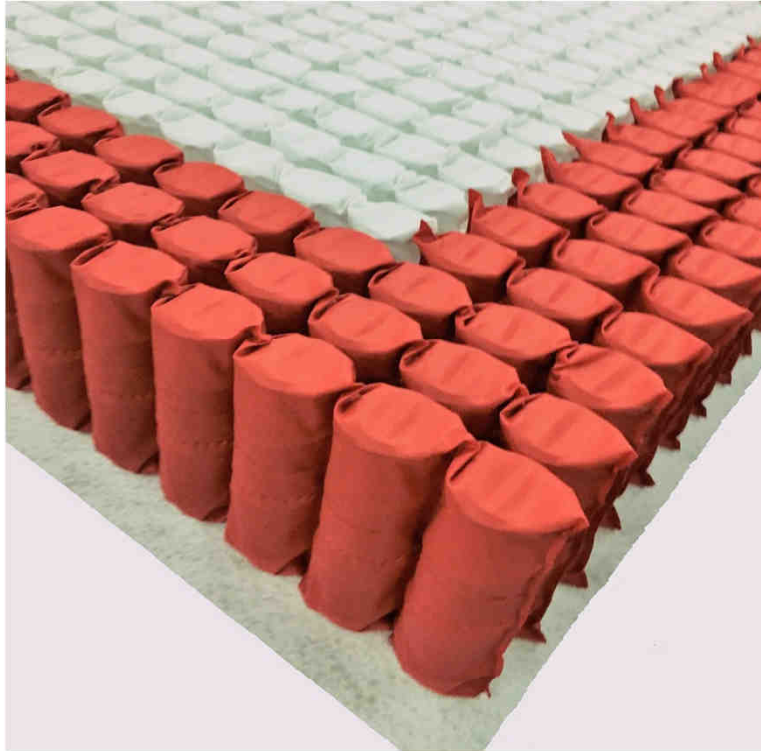


Springs Specification	
∅ wire (mm)	1.80/2.10 ±0,04
∅ barrel (mm)	65
Pre-compression (%)	32
Spring weight (grs)	21.4 – 28.1
Unit weight 148x188 (kg)	21.47
Spring/sqm	260
Heat treatment	Electric 3 phases system
Wire tensile (Kn/mm2)	1,9-2,05
% high carbon steel	0,7-0,8

Non Woven fabric (Springs)	
Type	Spunbond
Density (grs/m2)	75
Colour	White

Non Woven fabric (Top and Bottom)	
Type	Needlepunch
Density (grs/m2)	100
Colour	White

- By using revolver system we can provide different firmest in one roll. So we can achieve a very firm edge without foam encasing.
- Better comfort and transpirability than foam
- Ever last perimeter.
- Easy and safe for Bed in a Box.

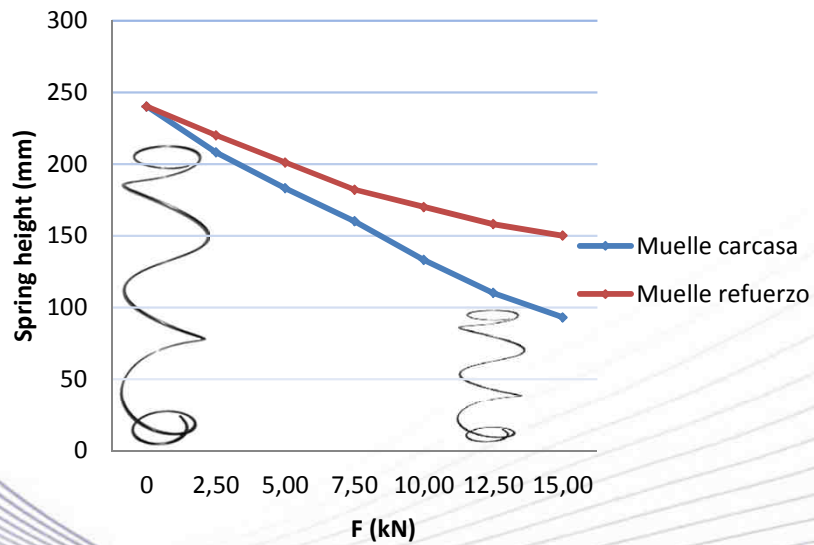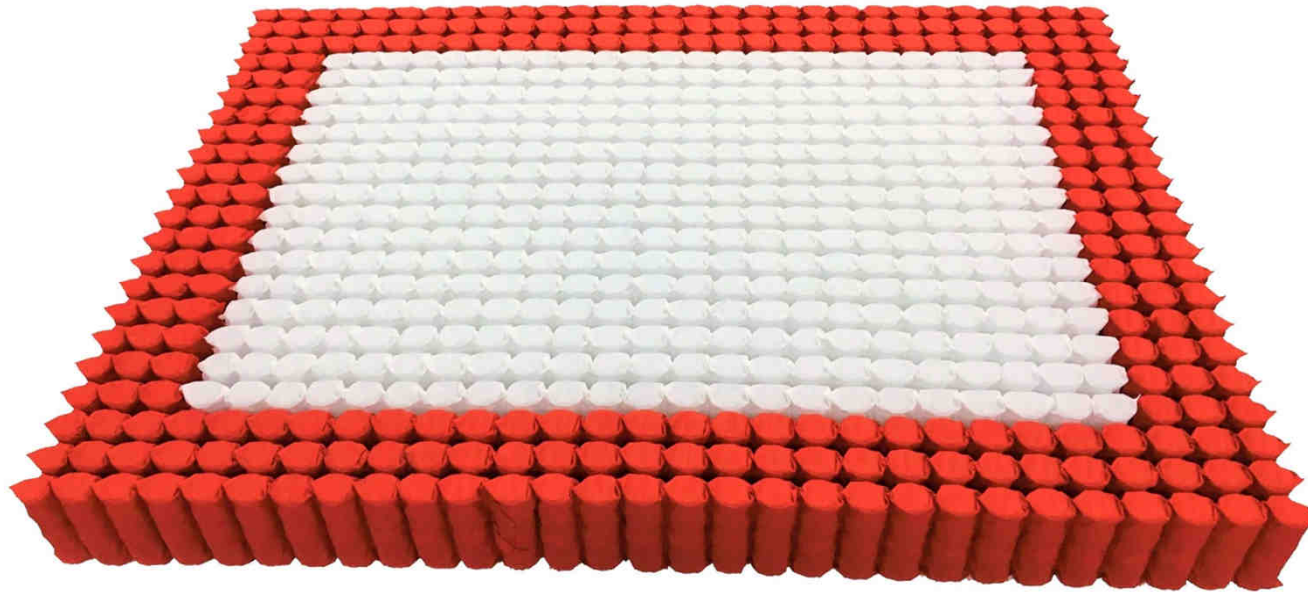

- Resistance to compression of the spring in the reinforcement up to 43% greater than the central part.

- Increased half-life of up to 30% in relation to the foam frame

- 5 years guarantee